


Holp - the modular system

RotoTop is available with a tilt on top as tilt rotator – RotoX in two different constructions. Alternatively, a swivel bucket or tilt module can also be fixed underneath.

RotoX 2x90° *


Standard version with distribution block



ROTOX
the modular tiltrotator


RotoX 2x75° *

New version without distribution block

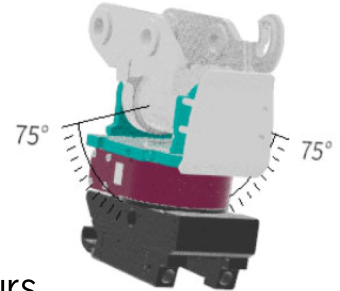

RotoTop as centre piece

3 years of warranty or 3.000 operating hours when permanently attached to machine

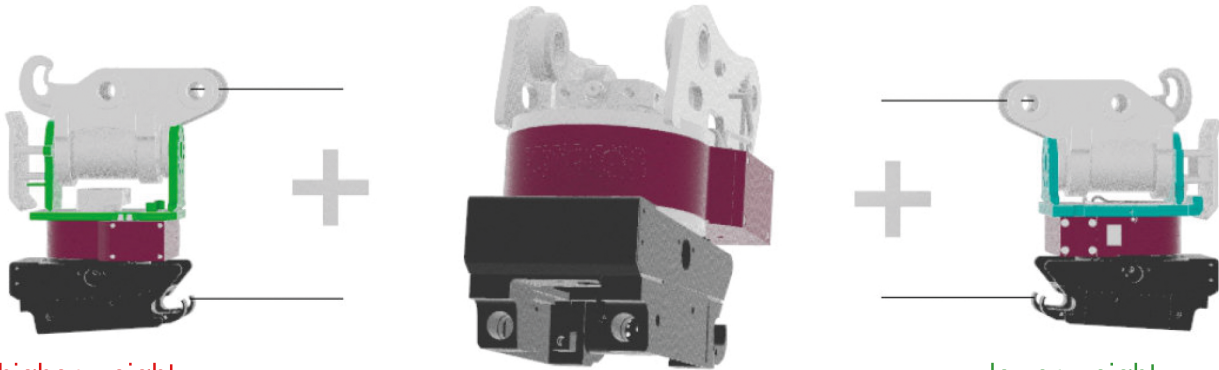


- higher weight
- less break-away-force
- bulkier construction
- bigger working range
- maximum oil quantity for continuous use of mulchers, moulders and plate compactors without thermic problems

- lower weight
- more break-away-force
- flat construction
- less working range
- oil quantity sufficient for gripper arms /swivel buckets

The alternative to a tilt rotator

RotoTop with swivel bucket or with tilt as “sandwich-solution”

- bulkier construction
- lower break-way-force
- higher weight

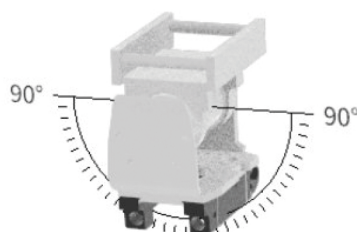

- time of use according to customers < 5 %
- can be put aside for civil engineering

* for excavators up to 10t working weight swivel angle 2x 90°, above 2x 60°